

ABSOLUTE POWER

2nd Generation Starter Batteries

PRODUCT CATALOGUE



VIMBATTERIES.COM

 MADE IN
ITALY

START & STOP BATTERIES

STAMINA / FORCE / PUNCH / POTENCY

12V

ETN CODE	V CODE	Ah (20 h)	Ah (-18°C) EN 7,5V 10"	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
STAMINA AGM START & STOP		ABSORBENT GLASS MAT							
S560.901.068	VAGM	60	680	242	175	190	0	1	B3
S570.901.076	VAGM	70	760	275	175	190	0	1	B3
S580.901.080	VAGM	80	800	310	175	190	0	1	B3
S595.901.085	VAGM	95	850	353	175	190	0	1	B3
S605.901.095	VAGM	105	950	393	175	190	0	1	B3
STAMINA EFB START & STOP		ENHANCED FLOODED BATTERIES			ENHANCED FLOODED BATTERIES				
S560.901.068	VEFB	60	570	242	175	190	0	1	B3
S570.901.076	VEFB	65	650	275	175	175	0	1	B3 (+B4)
S580.901.080	VEFB	72	720	275	175	190	0	1	B3
S595.901.085	VEFB	75	730	310	175	175	0	1	B3
S605.901.095	VEFB	80	770	310	175	190	0	1	B3
STAMINA EFB START & STOP		ENHANCED FLOODED BATTERIES			JIS	ENHANCED FLOODED BATTERIES			
S560.901.068	VEFB	37	370	195	129	225	0	3*	B0
S570.901.076	VEFB	55	460	237	127	225	0	3*	B0
S580.901.080	VEFB	65	560	230	170	225	0	1	B0
S595.901.085	VEFB	72	660	270	175	225	0	1	B0
S605.901.095	VEFB	95	760	303	175	225	0	1	B0
POTENCY STANDARD DIN									
S560.901.068	VEFB	55	520	207	175	190	0	1	B3
S570.901.076	VEFB	64	630	242	175	190	0	1	B3
S580.901.080	VEFB	82	770	275	175	190	0	1	B3
S595.901.085	VEFB	100	820	310	175	190	0	1	B3
S605.901.095	VEFB	100	860	353	175	190	0	1	B3
POTENCY LOW DIN									
S560.901.068	VEFB	50	500	207	175	175	0	1	B3 (+B4)
S570.901.076	VEFB	63	610	242	175	175	0	1	B3 (+B4)
S580.901.080	VEFB	74	720	275	175	175	0	1	B3 (+B4)
S595.901.085	VEFB	84	780	310	175	175	0	1	B3
S605.901.095	VEFB	92	800	353	175	175	0	1	B3

VIM BATTERIES reserves the right to carry out at any time any kind of modification to the technical data, to the manufacturing procedures and/or top the range of products, without giving previous written information.

L=Length W=Width H=Height

* Adapter from terminal type 3 to 1

Vim batteries has the power and endurance to get you going, sourced from Western Europe.

Address

Corso Silvano Fedi, 13 - 51100 - Pistoia (PT)
Italy

Need Help?

info@vimbatteries.com
+39 331 7364922

More Info

www.vimbatteries.com

START & STOP BATTERIES

POTENCY

12V

ETN CODE	V CODE	Ah (20 h)	Ah (-18°C) EN 7,5V 10"	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
FORCE STANDARD DIN									
S560.901.068	VAGM	44	420	175	175	190	0	1	B3
S570.901.076	VAGM	50	450	207	175	190	0	1	B3
S580.901.080	VAGM	55	500	207	175	190	0	1	B3
S595.901.085	VAGM	55	500	207	175	190	1	1	B3
S605.901.095	VAGM	62	590	242	175	190	0	1	B3
S560.901.068	VAGM	62	590	242	175	190	1	1	B3
S570.901.076	VAGM	74	680	275	175	190	0	1	B3
S580.901.080	VAGM	74	680	275	175	190	1	1	B3
S595.901.085	VAGM	80	720	275	175	190	0	1	B3
S605.901.095	VAGM	100	800	310	175	190	0	1	B3
S595.901.085	VAGM	100	800	310	175	190	1	1	B3
S605.901.095	VAGM	100	830	353	175	190	0	1	B3
FORCE LOW DIN									
S560.901.068	VEFB	47	450	207	175	175	0	1	B3 (+B4)
S570.901.076	VEFB	62	590	242	175	175	0	1	B3 (+B4)
S580.901.080	VEFB	72	680	275	175	175	0	1	B3 (+B4)
S595.901.085	VEFB	82	740	310	175	175	0	1	B3
S605.901.095	VEFB	92	800	353	175	175	0	1	B3
FORCE STANDARD PUNCH									
S560.901.068	VAGM	37	330	187	127	225	0	3*	B0
S570.901.076	VAGM	37	330	187	127	225	1	3*	B0
S580.901.080	VAGM	37	330	187	135	225	0	3*	B1
S595.901.085	VAGM	45	300	218	135	225	0	1	B1
S605.901.095	VAGM	45	300	218	135	225	1	1	B1
S560.901.068	VAGM	45	360	237	127	225	0	3*	B0
S570.901.076	VAGM	45	360	237	127	225	1	3*	B0
S580.901.080	VAGM	50	420	200	170	225	0	1	B0
S595.901.085	VAGM	50	420	200	170	225	1	1	B0
S605.901.095	VAGM	60	490	230	170	225	0	1	B0
S595.901.085	VAGM	60	490	230	170	225	1	1	B0
S605.901.095	VAGM	70	560	270	175	225	0	1	B3 (+B6)
S605.901.095	VAGM	70	560	270	175	225	1	1	B3 (+B6)
S595.901.085	VAGM	95	760	303	175	225	0	1	B6
S605.901.095	VAGM	95	760	303	175	225	1	1	B6

L=Length W=Width H=Height

* Adapter from terminal type 3 to 1

START & STOP BATTERIES

VITAL / POTENCY / SOLIDITY / MAX-P

12V

ETN CODE	V CODE	Ah (20 h)	Ah (-18°C) EN 7,5V 10"	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
FORCE GARDEN LINE									
S560.901.068	VAGM	30	330	195	130	183	DX	4	B0
S570.901.076	VAGM	30	330	195	130	183	DX	4	B0
PUNCH STANDARD DIN									
S560.901.068	VEFB	24	180	187	128	167	0	4	B0
S570.901.076	VEFB	24	180	187	128	167	1	4	B0
S580.901.080	VEFB	32	220	233	131	167	0	4	B0
S595.901.085	VEFB	40	360	175	175	190	0	1	B3
S605.901.095	VEFB	44	400	207	175	190	0	1	B3
S570.901.076	VEFB	50	450	207	175	190	0	1	B3
S580.901.080	VEFB	60	540	242	175	190	0	1	B3
S595.901.085	VEFB	70	640	275	175	190	0	1	B3
S605.901.095	VEFB	74	660	275	175	190	0	1	B3
S580.901.080	VEFB	100	790	310	175	190	0	1	B3
S595.901.085	VEFB	100	810	353	175	190	0	1	B3
S605.901.095	VEFB	110	950	393	175	190	0	1	B3
PUNCH LOW DIN									
S560.901.068	VEFB	44	400	207	175	175	0	1	B3 (+B4)
S570.901.076	VEFB	60	540	242	175	175	0	1	B3 (+B4)
S580.901.080	VEFB	70	640	275	175	175	0	1	B3 (+B4)
S595.901.085	VEFB	80	700	310	175	175	0	1	B3
SOLIDITY SHD (SUPER HEAVY DUTY)									
S560.901.068	VEFB	150	850	510	189	223	3	1	B0
S570.901.076	VEFB	180	1050	513	223	223	3	1	B0
S580.901.080	VEFB	230	1250	518	273	240	3	1	B0
MAX-P HD (HEAVY DUTY)									
S560.901.068	VEFB	135	850	510	175	189	3	1	B0
S570.901.076	VEFB	150	900	510	175	189	3	1	B0
S580.901.080	VEFB	150	1000	510	175	175	3	1	B3
S595.901.085	VEFB	150	900	513	175	223	4	1	B3
S605.901.095	VEFB	150	900	513	175	223	3	1	B0
S570.901.076	VEFB	180	1000	513	175	223	4	1	B3
S580.901.080	VEFB	180	1000	513	175	223	3	1	B0
S595.901.085	VEFB	200	1100	513	175	223	4	1	B3
S605.901.095	VEFB	200	1100	513	175	223	3	1	B0
S580.901.080	VEFB	225	1200	518	175	223	4	1	B0
S595.901.085	VEFB	225	1200	518	175	223	3	1	B0

START & STOP BATTERIES

MAX-P

12V

ETN CODE	V CODE	Ah (20 h)	Ah (-18°C) EN 7,5V 10"	Length (mm)	Width (mm)	Height (mm)	Layout	Terminal	Hold Down
MAX-P									
S560.901.068	V EFB	100	800	330	175	205	0	1	B3
S570.901.076	V EFB	100	800	330	175	205	1	1	B3
S580.901.080	V EFB	110	740	343	172	230	0	1	B1
S595.901.085	V EFB	110	740	343	172	230	0	1	B0
S605.901.095	V EFB	110	740	343	172	230	1	1	B0
S570.901.076	V EFB	120	830	343	172	230	0	1	B1
S580.901.080	V EFB	120	820	510	175	225	4	1	B3
S595.901.085	V EFB	125	760	343	172	290	0	1	B0
S605.901.095	V EFB	135	1000	513	175	210	3	1	B3
S580.901.080	V EFB	140	900	510	175	205	0	1	B1

L=Length W=Width H=Height

* Adapter from terminal type 3 to 1


Features

Battery


	START STOP	+30	Light	Internal Labyrinth	Separator	Flame Arrestor	Hot Melt
Stamina AGM	V		V		V	V	
Stamina EFB	V			V	V	V	
Stamina EFB JIS	V			V	V	V	
Potency		V		V	V	V	
Force				V	V	V	
Solidity				V	V	V	V
Max-P							V

START STOP	Start & Stop	+30	+30% Di Spunto Higher Cold Cranking Current
Light	Tappo Con Guarnizione O-Ring	Internal Labyrinth	Labirinto Interno Internal Labyrinth
Separator	Separatori Lana Vetro Glass Fiber Separator	Plastiglia Anti-Fiamma Flame Arrestor	
Hot Melt	Sistema Anti-Fuoriuscita Acido Anti Spelling System	Resina A Caldo Hot Melt	


Layout

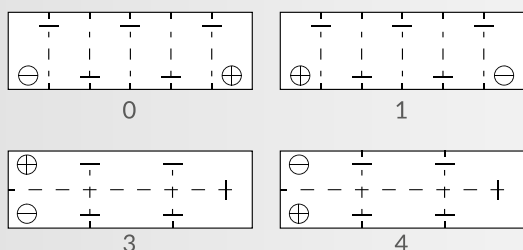

Terminal-Type

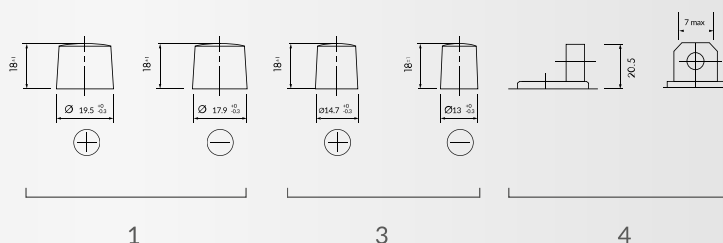

Hold Down

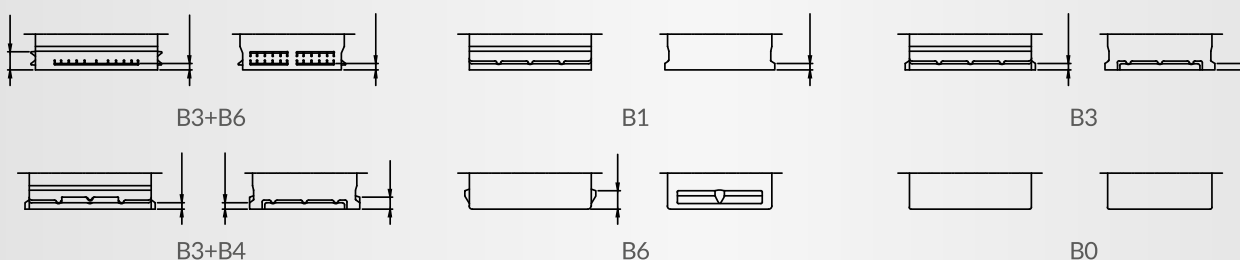



SHATTERING EXPECTATIONS

Superior quality batteries manufactured in Italy, we provide dependable technology thanks to decades of innovation.

VIM BATTERIES			MADE IN ITALY
ADDRESS Corso Silvano Fedi, 13 - 51100 - Pistoia (PT) - Italy	PHONE +39 331 7364922	EMAIL info@vimbatteries.com	WEBSITE vimbatteries.com